Continuous Flow Gas Water Heaters

Product Specifications

Leda

Leda's continuous flow gas water heaters feature state of the art technology and materials to provide superior energy efficiency, performance and long service life. Leda now features a high 6 Star energy rating for even lower running costs and greenhouse gas emissions.

Special Features:

- High 6 Star energy rating
- 20 & 26 litre per minute models
- Natural gas or Propane / LPG models
- 'Hot Flow' technology to minimize gas, water & electricity waste
- 100% Solar compatible
- Can be configured for commercial applications
- Frost protection
- Electronic ignition
- 50°C pre-set models available upon request*
- 10 year heat exchanger warranty / 3 years parts & labour

#Models factory pre-set to 50°C supply hot water at a maximum 50°C at all outlets in accordance with AS 3498. Some applications may require tempering. Refer to AS/NZS 3500:4 and local regulations & requirements in your state. Models for 60°C and higher must have a tempering valve installed in accordance with AS/NZS 3500:4.

Remote Controllers		
Controller Type		
Main/Kitchen	37,38,39,40,41,42,43,44,45,46,47,50,55	
Bathroom	37,38,39,40,41,42,43,44,45,46,47,50	
Ensuite	37,38,39,40,41,42,43,44,45,46,47,50	


Physical Dimensions and Characteristics			
Leda Model	LCN20	LCN26	
Energy Star Rating	6-Star		
Thermal Efficiency (%)	80.5	81.7	
Flue System	Forced Flued External		
Rating (I/min @ 25°C rise)	20	26	
Nominal Gas Consumption (MJ/h)	160	193	
Weight (kg)	15.7	17.2	
Height plus bracket (mm)	570		
Width (mm)	350		
Depth (mm)	170	230	
Water connection diameter (mm)	15 BSP		
Gas connection diameter (mm)	20 BSP		
Water Pressure minimum (kPa)*	200		
Water Pressure maximum (kPa)	1200		
Water Pressure Optimal (kPa)	500		
Anti-frost	Standard		
Power Supply Mains Voltage (AC)	240		
Power Supply Controller Voltage (DC)	12		
Ignition	Electronic		
Gas Types	Natural Gas / LPG		
Housing Colour	Beige		







- If controllers are optioned, a Main Controller is required as the master unit
- Maximum of one of each type of controller (ie. max 3 remotes)
- Not suitable for use with solar hot water systems

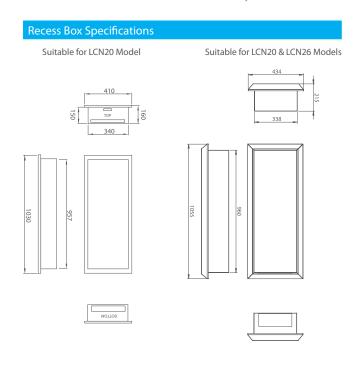

*Performance of Leda water heaters will be reduced below 350kPa

1800 697 652 www.ledaaustralia.com