

STELLAR®

RHEEM STELLAR® GAS HOT WATER



1-6

MAINS PRESSURE 10 YEAR CYLINDER WARRANTY^{1,2}



RHEEM STELLAR® 330 & 360

- **5 Star energy efficiency** uses less gas than 3 or 4 Star water heaters
- Advanced technology the Stellar Superflue® increases efficiency and performance, reducing energy consumption to save you money
- Mains pressure to service multiple hot water demands at once
- 200L/hour hot water recovery more than you will likely need!
- 10 Year cylinder warranty¹
- 330 or 360L first hour capacity³
- Australian made

RHEEM STELLAR® 330 STAINLESS STEEL

- 5 Star energy efficiency
- Stainless Steel Cylinder
- 185L/hour hot water recovery⁵ enough for large families
- Up to 50L/hour additional hot water recovery (depending on temperature chosen) via the inbuilt adjustable mixing valve⁶
- Mains pressure to service multiple hot water demand at once
- 10 Year cylinder warranty²
- · Australian made











STELLAR®

THE BEST IN GAS HOT WATER

Rheem Stellar® is synonymous with the best in gas hot water, providing superior energy efficiency and hot water recovery.

Now Rheem Stellar® adds even more innovation and performance with the addition of Stellar Stainless Steel to the range.


THE STAINLESS STEEL ADVANTAGE

The stainless steel cylinder in selected Rheem Stellar® models not only offers purity and durability, it can help save money in the long run.


- Can resist corrosion for longer than conventional vitreous enamel cylinders
- No sacrificial anode, for reduced lifetime service costs
- Superior energy efficiency

Rheem Stellar® Stainless Steel water heaters are not recommended for installation in some areas. Refer to the Rheem website www.rheem.com.au for details of areas not recommended and for which product is not covered by warranty.

Rheem® Stellar 330/360

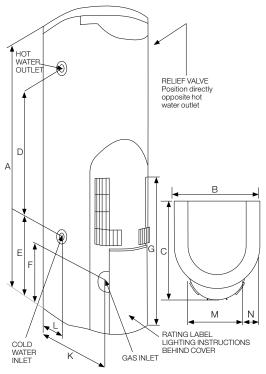

SPECIFICATIONS		850330	850360	8A0330 stainless steel
AGA Star Rating Index		5 Stars	5 Stars	5 Stars
Suitable for Number of People				
Moderate Climate		2-5	3-6	3-6
Cool Climate		2-4	3-5	3-5
Storage Capacity	Litres	130	160	155
Recovery Rate at 45°C Rise	Litres/Hr	200	200	185
First Hour Capacity ³	Litres	330	360	340
Hourly Gas Consumption				
Natural Gas	MJ/Hr	42	42	40
Approx. Weight Empty	kg	70	80	65
Approx. Weight Full	kg	200	240	220
Relief Valve Setting	kPa	1400	1400	1400
Expansion Control Valve Setting	kPa	1200	1200	1200
Max. Water Supply Pressure				
Without ECV	kPa	1120	1120	1120
With ECV⁴	kPa	960	960	960
Water Connection LHS		RP3/4"/20	RP3/4"/20	RP3/4" (20mm) Female
Gas Connection		RP½"/15	RP½"/15	½" Flared Compression
Installation Type		External Only	External Only	External Only
Warranty (Cylinder) ^{1,2}		10 Years	10 Years	10 Years
Dimensions				
A (Height)	mm	1600	1900	1625
B (Width) Approx.	mm	485	485	520
C (Depth) Approx.	mm	558	558	610
D	mm	988	1213	60
E	mm	328	409	333
F	mm	298	298	360
G	mm	770	770	840
K	mm	520	520	-
L	mm	252	252	-
M	mm	299	299	415
N	mm	93	93	52

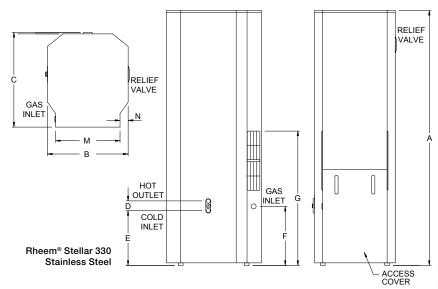

1. Rheem Stellar 330/360 warranty: 10 Years Cylinder and SuperFlue® Warranty, 5 Years labour on Cylinder and SuperFlue®, 1 Year parts & labour warranty on all other components. For Domestic (non-commercial) installations. 2. Rheem Stellar 330 Stainless Steel Warranty; 10 year cylinder warranty, 11 year parts and labour warranty on all other components for domestic (non-commercial) installations. Conditions apply. See the Rheem warranty set out in the Owner's Guide & Installation Instructions or view it at www.rheem.com.au/warranty, 3. First hour capacity is the storage capacity plus nominal first hour recovery rate at 45°C temperature rise using Natural Gas. 4. ECV not supplied. 5. At 45°C temperature rise. 6. Guide only. Based on a cold water temperature of 15°C.

Materials and data are subject to change without notice. *Registered Trademark of Rheem Australia Pty Ltd. **Trademark of Rheem Australia Pty Ltd.

Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia PO Box 6, Rydalmere, New South Wales 2116, Australia

