









DELIVERY

WARRANTY¹

INSTALLATION





FEATURES

- Fast, easy like-for-like replacement
- Dual handed inlet and outlet fittings
- 10 year cylinder warranty, 3 years labour on cylinder¹
- All models suit connection to concessional (off-peak) tariffs
- Proven reliability
- 250-400L models also available with twin elements

WHY CHOOSE EVERHOT


- Made in Australia²
- Available model range suits most applications
- Capacities to suit most family sizes and hot water requirements
- Mains pressure water delivery for water that comes on steady, hot and strong!
- Full warranty backing through a national service network





MODEL		160L	250L	315L	400L
Everhot® Dual Handed Single Element		291 160	291 250	291 315	291 400
Everhot® Dual Handed Twin Element			292 250	292 315	292 400
Hot Water Delivery	Litres	160	250	315	400
Boost Capacity	Litres	-	50	50	90
kW Rating	2.4	✓	_	_	-
	3.6	✓	✓	✓	-
	4.8	-	√ *	✓	✓
Relief Valve Setting	kPa	1000	1000	1000	1000
Expansion Control Valve (kPa)	kPa	850	850	850	850
Max Water Supply Pressure:					
with ECV (kPa)	kPa	680	680	680	680
without ECV (kPa)	kPa	800	800	800	800
Water Connections		RP ³ / ₄ /20	RP3/4/20	RP ³ / ₄ /20	RP ³ / ₄ /20
Dimensions					
A	mm	1610	1395	1640	1840
В	mm	480	640	640	690
С	mm	515	680	680	730
D	mm	1332	1117	1317	1479
Е	mm	104	73	113	121
F	mm	66	103	103	105
G	mm	-	1005	1255	1346
Н	degrees	23	32	32	30
J	degrees	58	88	88	83
M	mm	58	92	92	97
Approx. Weight (Empty)	kg	55	75	99	118

^{*4.8}kW element rating not available in 250L twin element model range.

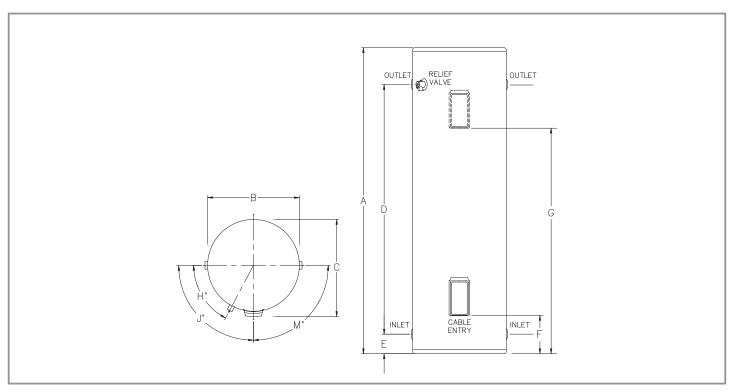







Conditions apply. See the warranty set out in the Owner's Guide & Installation Instructions

Registered Trademark of Rheem Australia Pty Ltd. Materials and data are subject to change without notice.